



WATERSON STAINLESS STEEL GLASS DOOR CLOSER HINGE

FRAMELESS SERIES

EASY TO OPEN & CLOSE

5LBS LOW OPENING FORCE



CHILD SAFE



SENIORS FRIENDLY



ADA COMPLIANT



Waterson USA

478 Northdale Road,
Suite 705, Lawrenceville,
GA 30046, USA

Phone: +1-770-746-9758
Website: watersonusa.com
Email: hinges@watersonusa.com

EASY INSTALLATION


Minimize effort and expense while
maximizing aesthetics

NO DIGGING | REDUCED COST | EASILY MAINTAINED





COMPARISON CHART

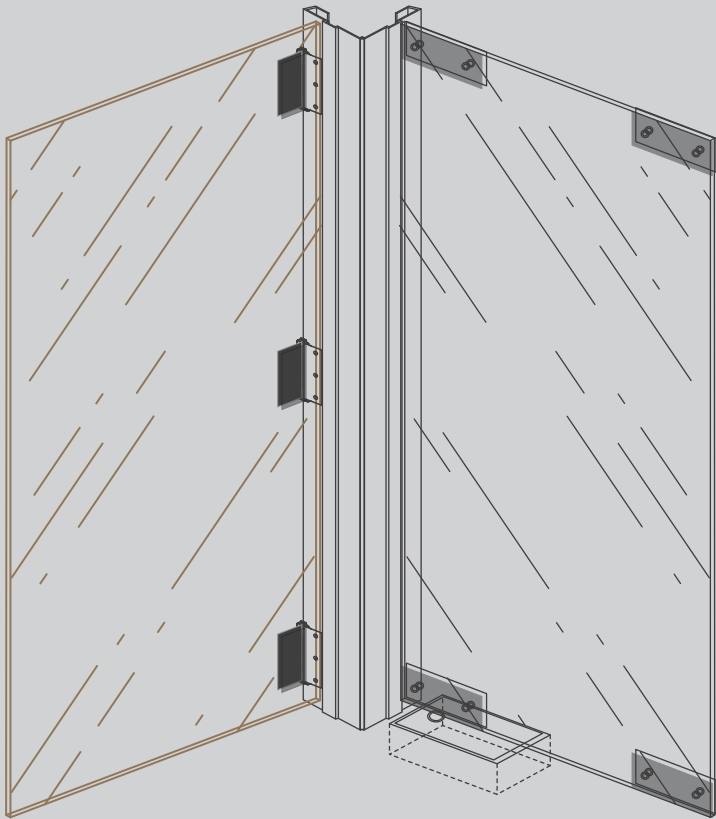

Criteria	Waterson Closer Hinge	Floor Spring
Installation Position / Hinge Position	Directly Installed On Door	Buried In Floor
User Experience	Easy To Open	Heavy To Open
Outdoor Use	Yes	No
Total Cost	Low	High
Product Lifetime	5 Year Warranty	Brand Specific
Hold Open	90°/ 110°/ 120° Hold Open	90°/ 135°/ 180° And Other Angles



Glass to Wall
K51GWL

Aesthetic self-closing with modern glass



Glass to Glass
K51GG

Ideal for commercial glass environments



Glass to Frame
K51GM

Easily replace standard wood/metal doors with glass

PRODUCT SELECTION TABLE

Stainless Steel Glass Closer Hinges Series; Suitable for 8-12mm (5/16"-1/2") Glass Thickness

Frameless Glass Door Size			Operation			Glass Closer Hinges Set		
Use Style	W x H (ft)	Weight (lbs)	Features			# of Hinges	Model	Set
			Hold Open	Self-closing	Fluid Motion Indoor Use			
Glass to Wall Wall Width >= 1-1/2" (38mm)	< 6'-0 x 4'-0	≤ 150		V	V	2	K51GWL-B2	HS.SA
			V	V	V	2	K51GWL-D2	HS.SB
	< 7'-0 x 4'-0	≤ 260		V	V	3	K51GWL-B3	SA.HS.SA1
			V	V	V	3	K51GWL-D3	SA.HS.SB
Glass to Glass Both sides attach to glass	< 6'-0 x 4'-0	≤ 150		V	V	2	K51GG-B2	HS.SA
			V	V	V	2	K51GG-D2	HS.SB
	< 7'-0 x 4'-0	≤ 260		V	V	3	K51GG-B3	SA.HS.SA1
			V	V	V	3	K51GG-D3	SA.HS.SB
Glass to Frame Frame thickness >=1-3/4" (40mm)	< 6'-0 x 4'-0	≤ 150		V	V	2	K51GM-B2	DS.HA
			V	V	V	2	K51GM-D2	HS.SB
	< 7'-0 x 4'-0	≤ 260		V	V	3	K51GM-B3	DS.HA.SA1
			V	V	V	3	K51GM-D3	DS.HA.SB
	< 8'-0 x 4'-0	≤ 260	V	V	V	4	K51GM-D4	DS.HA.SB.SA1
	< 8'-0 x 4'-0	≤ 330		V	V	4	K51GM-B4	DS.HA.SA.SA1

- Door Stop Options: A) two hinge set requires one door stop; B) three-four hinge set requires two door stops.
- Door stops available in 90° and 110° types
- Regular glass door operation from 0° to 120°